

FALC

TRIPLEX

**ELEVATORE IDRAULICO - ELEVATEUR HYDRAULIQUE
- HYDRAULIC FORKLIFT - HYDRAULIK-STAPLER -
ELEVADOR HIDRÁULICO**



**Elevatori idraulici con 3 sfili, per trattori.
Portata kg 1500**

**Elévateurs hydrauliques triple télescopique, pour tracteurs.
Capacité de charge Kg 1500**

**Triple telescopic hydraulic forklifts, for tractors.
Load capacity Kg 1500**


**3-stufiger Hydraulik-Stapler, für Traktoren.
Leistung Kg 1500**



**Elevadores hidráulicos telescópicos triples, para tractores.
Capacidad de carga kg 1500**



TRIPLEX

FALC

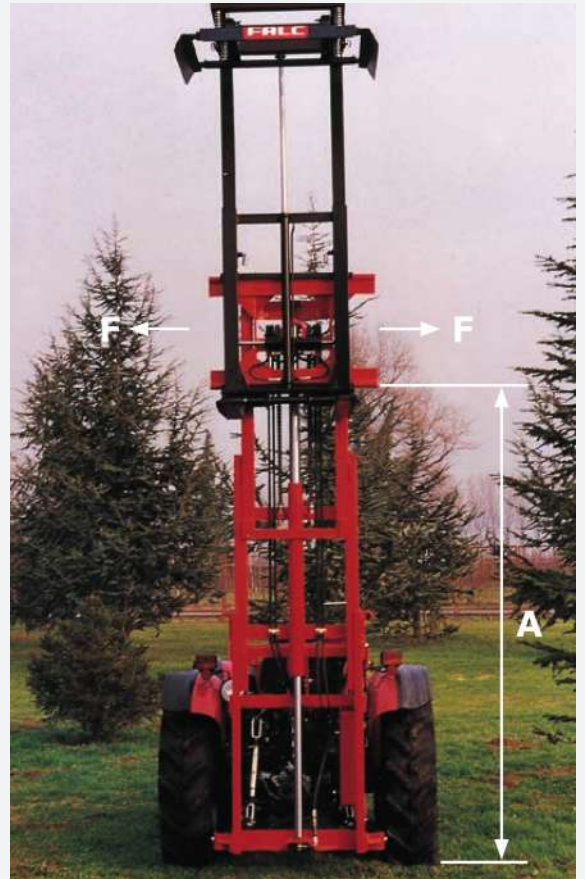

TRIPLEX	A	B	C	D	E	F		
	mm.	mm.	mm.	mm.	mm.	mm.	kg.	
2500	2500	1480	250	1130	2000	100+100	440	
3200	3200	1860	250	1360	2460	100+100	510	
3800	3800	2050	250	1360	2460	100+100	570	



È possibile alzare il carico fino a 20 cm da terra, senza che aumenti l'ingombro B.



Il est possible de soulever le charge jusqu'à 20 cm du sol sans augmenter l'encombrement B.



It is possible to lift the load up to 20 cm from the ground, without increasing the dimension B.



Es ist möglich, die Belastung bis zu 20cm vom Boden zu heben, ohne das Ausmaß B zu vermehren.



Se puede levantar la carga hasta 20 cm del suelo sin aumentar la dimensión B.



FALC

Via Proventa, 41
48018 Faenza (Italia)
Tel. +39 0546 29050

www.falc.eu | info@falc.eu

